


MOAC-E-CSB

EU Technical Datasheet

CASAMBI
READY

EULUM
DESIGN

Dimensions

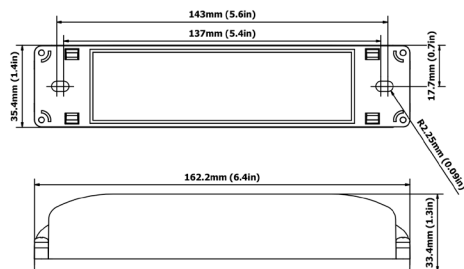

Wiring Diagram



General Description

Single output Casambi enabled controller for blinds/curtains with AC motor. 120-277VAC, 10A max.

Technical Specifications

Housing	Plastic Injection Moulded ABS
Dimensions	162.2mm x 35mm x 33.3mm
Weight	<0.2kg
Electrical Connections	0.25mm to 1.3mm ² (18-24AWG)
Mechanical Mount. Connection	Screw Down
Operating Temp. Ambient	0°C to +50°C
Storage Temp.	-40°C to +80°C
Input Voltage	120-277VAC
Switching Output	10A max
Maximum Power	277w
Max. Off-State Pwr Consumption	≤0.5w
Dimming	N/A
Dimming Output	N/A
Wireless Protocol	Bluetooth Low Energy v4.1
Standards	CE FC

Features

- Single channel motor controller
- Capable of loads up to 10A max
- Casambi enabled
- Bluetooth beacons

Order Codes

MOAC-E-CSB-1: Single output Casambi enabled controller for blinds/ curtains with AC motor. 120-277VAC, 10A Max.